

SUPPLY SCOPE: only the Nudura ICF formwork and associated accessories are in our price. Slab, floor, roof, joinery, Dryvit render, tapes, roofing and stair are supplied in good faith from the model and must be checked by the relevant professional. PLANNING APPLICATION: ridge 5988 is above the Class E 4.0 m limit; eaves 2474 kept < 2,500. Room in the roof by an external steel stair.

QUOTATION - NOT FOR CONSTRUCTION

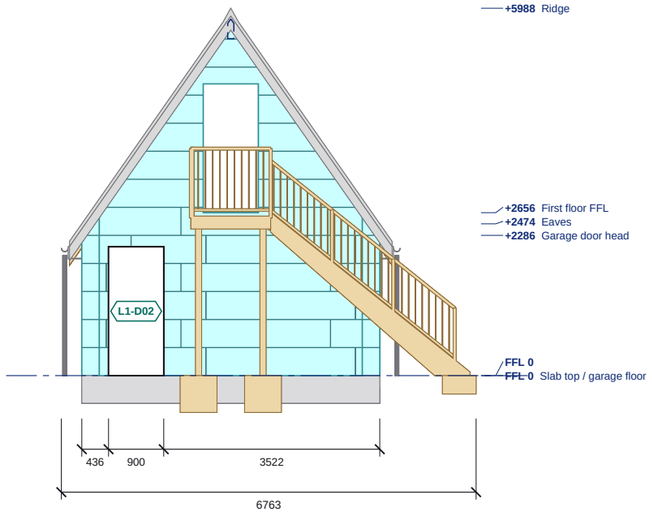

FRONT ELEVATION (GARAGE DOOR + RAKED GABLE GLAZING)

Scale 1:100 @ A3 | Levels above GF FFL; sills and heads in the schedule

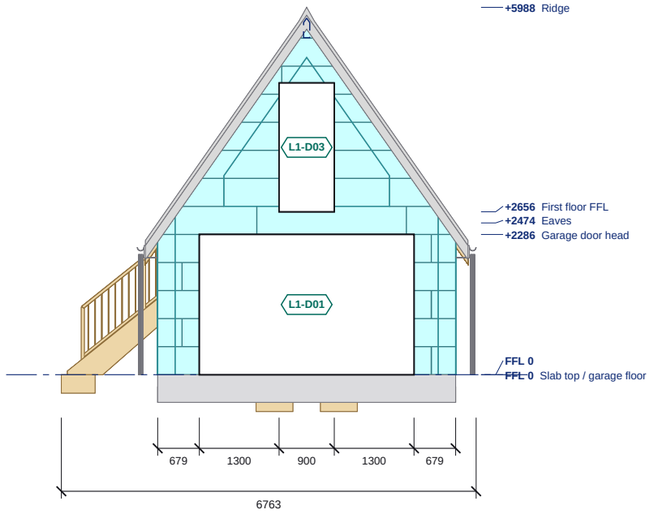

REAR ELEVATION

Scale 1:100 @ A3 | Levels above GF FFL; sills and heads in the schedule

ICF external EPS face
Block course joint
Stack joint
Roof build-up (slab / earth / sedum)

0 1 2 3 4 5m

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

ELEVATION SCHEDULES

FRONT ELEVATION (GARAGE DOOR + RAKED GABLE GLAZING): OPENINGS

Ref	Width	Height	Sill	Head	Lintel
L1-D02	900	2100	0	+2100	-

Structural openings in the ICF; sill and head above GF FFL.

REAR ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
L1-D01	3500	2286	0	+2286	-
L1-D03	900	2100	+2656	+4756	-

Structural openings in the ICF; sill and head above GF FFL.

FRONT ELEVATION (GARAGE DOOR + RAKED GABLE GLAZING): LEVELS

Level	FFL
Slab top / garage floor	0
underside of ICF	0
Garage door head	+2286
Eaves	+2474
First floor FFL	+2656
Ridge	+5988

REAR ELEVATION: LEVELS

Level	FFL
Slab top / garage floor	0
underside of ICF	0
Garage door head	+2286
Eaves	+2474
First floor FFL	+2656
Ridge	+5988

NOTES

1. ICF: Nudura 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
2. Levels above GF FFL. Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
3. Roof build-up shown as modelled.
4. See DG-B-GA-01 for plan setting out, lintels and steel.
5. Datum: 0 = raft slab top / garage floor. Replacement for the 4,950 x 5,110 precast double garage (site address TBC).

REVISIONS

REV	DATE	DESCRIPTION
Q01	28.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Dortech Direct (James, MD) via Andy Claridge, Tremco CPG	Two-storey garage in Nudura ICF - Option B - Room in the roof

DRAWING TITLE

NORTH AND SOUTH ELEVATIONS

ICF elevations with openings, levels and roof build-up

SCALE	SIZE	DATE
1:100	A3	28.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	DG-B-EL-01	Q01